












# V39, K8.0

Extended Coverage/Light Hazard (ECLH)  
Adjustable Concealed Pendent

## V3904 QUICK RESPONSE

### DISTRIBUTION PATTERNS

### Models V3904 K8.0 ECLH CONCEALED PENDENT DISTRIBUTION PATTERNS – TRAJECTORY

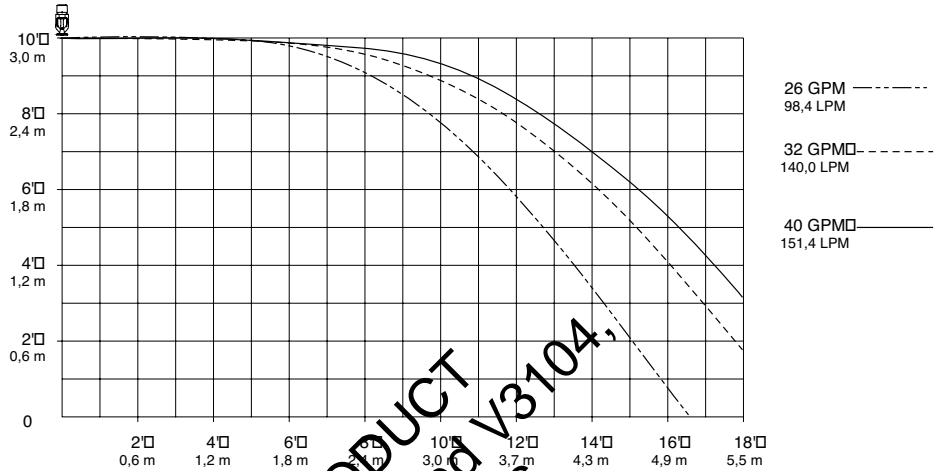

#### NOTES:

- 1 Data shown is approximate and can vary due to differences in installation.
- 2 These graphs illustrate approximate trajectories, floor-wetting, and wall-wetting patterns for these specific Victaulic Firelock automatic sprinklers. They are provided as information for guidance in avoiding obstructions to sprinklers and should not be used as minimum sprinkler spacing rules for installation. Refer to the appropriate NFPA National Fire Code or the authority having jurisdiction for specific information regarding obstructions, spacing limitations and area of coverage requirements. Failure to follow these guidelines could adversely affect the performance of the sprinkler and will void all Listings, Approvals and Warranties.
- 3 All patterns are symmetrical to the centerline of the waterway.

### WARRANTY

Refer to the Warranty section of the current Price List or contact Victaulic for details.

For complete contact information, visit [www.victaulic.com](http://www.victaulic.com)

40.71 3179 REV D UPDATED 07/2012

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2012 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

